

Technical document · 2024

# ECO+ PRO 2000 ARC

Combines heat efficiency with flexibility thanks to its practical tilting function.  
Easy heat control via the 3-step heat regulation and the included remote control.

<b>Effect</b>	Adjustable power range: 500 to 2000 watts for precise control.
<b>Heating capacity, TÜV certified*</b>	<i>Heat Zone:</i> Minimum 5 m <sup>2</sup> . <i>Comfort Zone:</i> Up to 12 m <sup>2</sup> . <i>Maximum Zone:</i> Up to 17 m <sup>2</sup>
<b>Technology</b>	Solamagic HeLeN Low-glare® technology
<b>Heating element</b>	Solamagic Solastar Low-glare® heating element
<b>Reflector</b>	Solamagic standard reflector
<b>Residual light emission</b>	70-75 LUX/KW
<b>Compliance standards</b>	IEC/EN 60335-1, CE
<b>IP rating</b>	IPX4
<b>Safety classification</b>	SK I
<b>Certifications</b>	TÜV-approved: Quality assured in products
<b>Material</b>	Coated aluminium and durable stainless steel
<b>Front grid</b>	Polished high-grade stainless steel finish
<b>Surface treatment</b>	Powder-coated with corrosion primer base, compliant with EN-ISO 6270-0 standard
<b>Colours</b>	Jet-black, Anthracite dark-gray, Titanium light-gray or Pure-white
<b>Weight</b>	3.7 kg
<b>Connector cable</b>	Integrated high-quality silicon-based, 1.8 m, 3-core cable, Schuko plug, grounded, UV-resistant
<b>Power supply</b>	230 v / 50 hz
<b>Ampere usage</b>	8.8 amp on 230 v. For optimal performance, use a 10 amp minimum, 13 amp recommended
<b>Installation</b>	Wall or ceiling: Versatile, efficient heating solutions
<b>Recommended mounting height</b>	1.8 – 2.4 meter
<b>Remote control</b>	Yes, included
<b>Garanty</b>	2 years
<b>Dimensions:</b> <b>L</b> – Lenght: 51.6 cm <b>D</b> – Depth: 17.6 cm <b>H1</b> – Height: 11.0 cm <b>H2</b> – Height incl. standard fittings: 23.0 cm <b>Angle:</b> 30°	

\*For more information about heating capacity see [www.27degreesbyssa.com](http://www.27degreesbyssa.com)


**Contact:**  
 info@ssa-ab.com  
 Tel DK: 38 414 500  
 Tel SE: 010-777 02 50

**27 degrees**  
 BY SSA


*It's always perfect outside*

## Safety distances

### Wall mounting

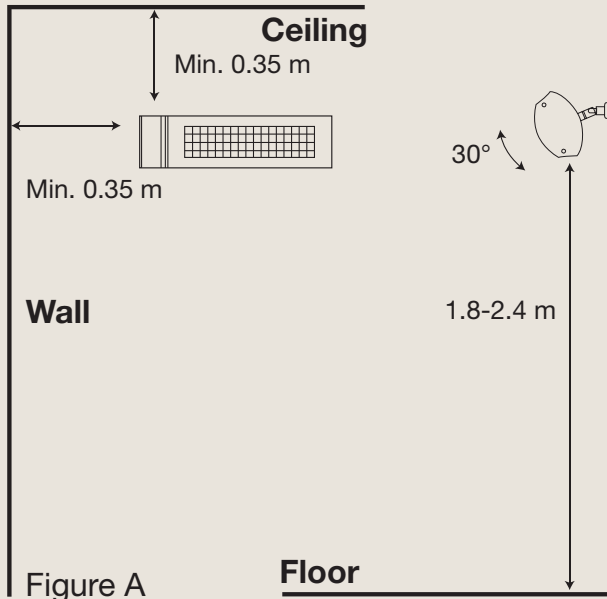


### Ceiling mounting

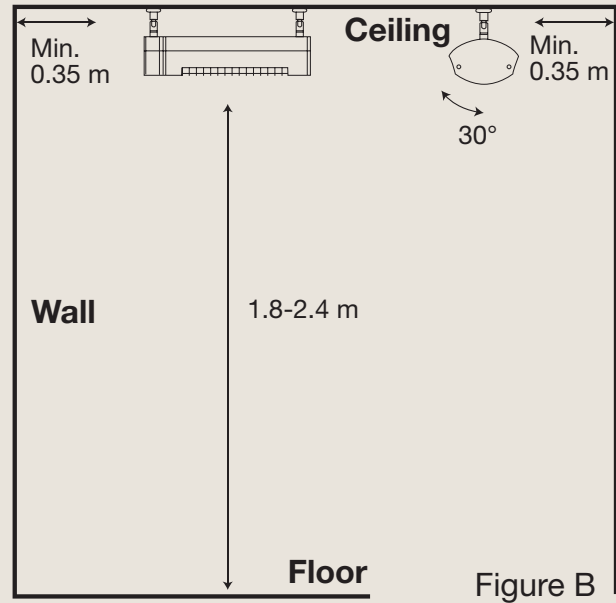

## Heating capacity at 2000 watts

Test features	Heat Zone	Comfort Zone	Max. Zone
<b>Mouting height</b>	2.4 meter	2.4 meter	2.4 meter
<b>Air temp., start</b>	11 C°	16 C°	19 C°
<b>Heat zone</b>	21 C° +/-0.5	21 C° +/-0,5	21 C° +/-0,5
<b>Windspeed</b>	3 m/sec.	3 m/sec.	0 m/sec.
<b>Capacity</b>	Minimum 5 m <sup>2</sup>	Up to 12 m <sup>2</sup>	Up to 17 m <sup>2</sup>

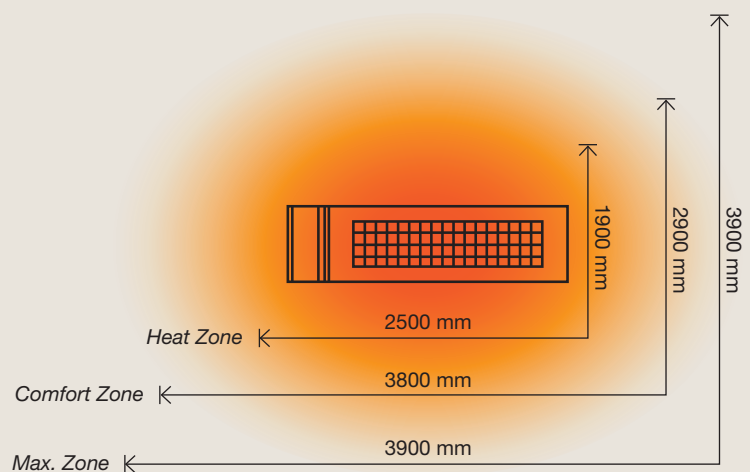

For more information  
about heating capacity see  
[www.27degreesbyssa.com](http://www.27degreesbyssa.com)