



Technical document · 2024

## ECO<sup>+</sup> PRO 2000

Combines heat efficiency with flexibility thanks to its practical tilting function.

Effect	2000 watts			
Heating capacity, TÜV certified*	Heat Zone: Minimum 5 m <sup>2</sup> . Comfort Zone: Up to 12 m <sup>2</sup> . Maximum Zone: Up to 17 m <sup>2</sup>			
Technology	Solamagic HeLeN Low-glare <sup>®</sup> technology			
Heating element	Solamagic Solastar Low-glare® heating element			
Reflector	Solamagic standard reflector			
Residual light emission	70-75 LUX/KW			
Compliance standards	IEC/EN 60335-1, CE			
IP rating	IPX4			
Safety classification	SKI			
Certifications	TÜV-approved: Quality assured in products			
Material	Coated aluminium and durable stainless steel			
Front grid	Polished high-grade stainless steel finish			
Surface treatment	Powder-coated with corrosion primer base, compliant with EN-ISO 6270-0 standard			
Colours	Jet-black, Anthracite dark-gray, Titanium light-gray or Pure-white			
Weight	2.8 kg			
Connector cable	Integrated high-quality silicon-based, 1.8 m, 3-core cable, Schuko plug, grounded, UV-resistant			
Power supply	230 v / 50 hz			
Ampere usage	8.8 amp on 230 v. For optimal performance, use a 10 amp minimum, 13 amp recommended			
Installation	Wall or ceiling: Versatile, efficient heating solutions			
Recommended mounting height	1.8 – 2.4 meter			
Remote control	Not included. Can be connected to the SSA Control system			
Garanty	2 years			
Dimensions: L1 – Lenght: 44.4 cm L2 – Lenght: 48.3 cm D – Depth: 17.6 cm H1 – Height: 11.0 cm H2 – Height incl. standard fittings: 23.0 cm Angle: +/- 30°	$ \begin{array}{c} & & & & \\ & & & \\ & & $			


\*For more information about heating capacity see www.27degreesbyssa.com

**27 degrees** By ssa It's always perfect outside

**Contact:** info@ssa-ab.com Tel DK: 38 414 500 Tel SE: 010-777 02 50




## Safety distances

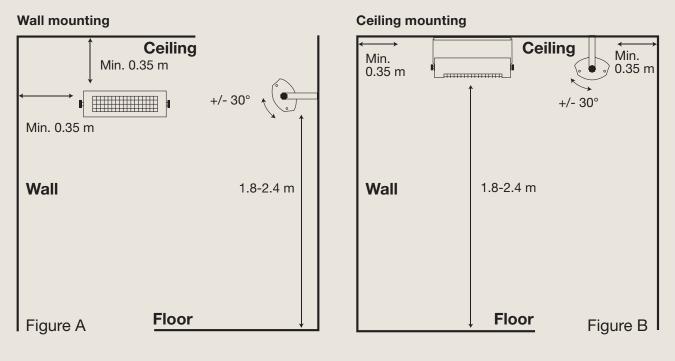

## Heating capacity at 2000 watts

Test features	Heat Zone	Comfort Zone	Max. Zone
Mouting height	2.4 meter	2.4 meter	2.4 meter
Air temp., start	11 C°	16 C°	19 C°
Heat zone	21 C° +/-0.5	21 C° +/-0,5	21 C° +/-0,5
Windspeed	3 m/sec.	3 m/sec.	0 m/sec.
Capacity	Minimum 5 m²	Up to 12 m <sup>2</sup>	Up to 17 m <sup>2</sup>

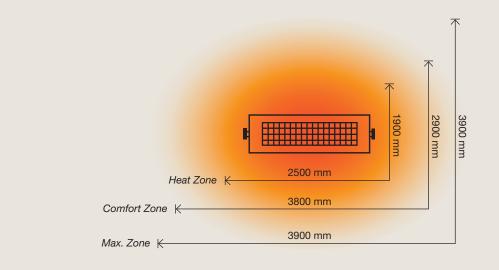

For more information about heating capacity see www.27degreesbyssa.com



**Contact:** info@ssa-ab.com Tel DK: 38 414 500 Tel SE: 010-777 02 50

It's always perfect outside